
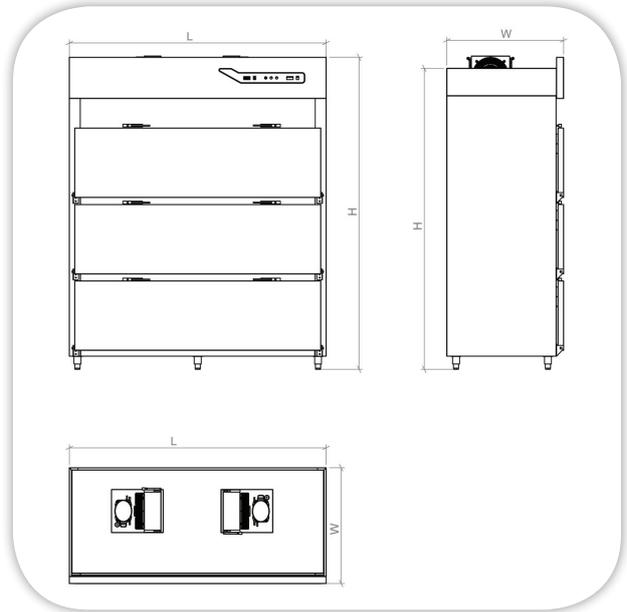


UPRIGHT MORTUARY REFRIGERATOR

Item:

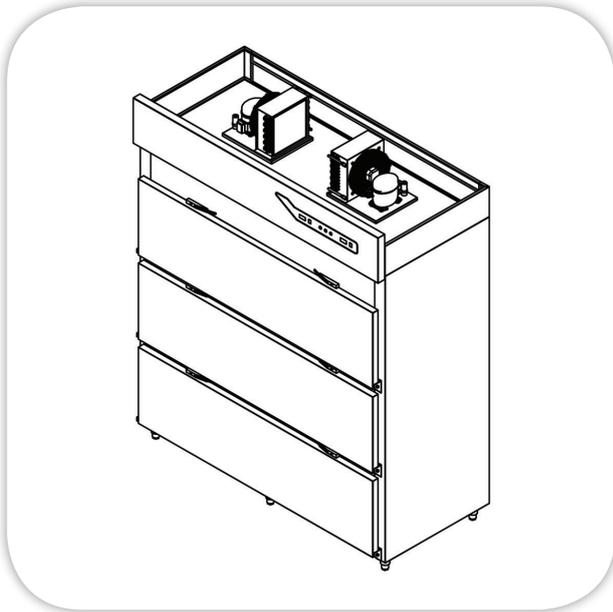

SPECIFICATIONS:

Body: Stainless steel (304) construction interior & exterior with foam insulation, density of 40 kg /m³, 75mm thickness,

Chamber: each equipped with stainless steel sliding litter tray dimensions (680×1900×60mm), chamber dimensions (750×2000×540mm) with lockable door dimensions (820×600×75mm)

Legs: (4) Stainless steel legs diameter 60mm, height 150mm with adjustable leveling feet.

Electric source: 220V/1Ph/50HZ.

Control: Digital control, Automatic defrost, Indication lamp, ON/OFF switch, with Audio-visual alarm, LED lighting.

Refrigeration System: Air cooled compressor, 220V/1ph/50HZ, Allowing inside temperature (+3 : +8°C), thermostatically controlled, Refrigerants R404 A, Heavy duty, High quality, imported (condensing unit & evaporator).

Available up-on request: two Ranges & three Ranges & stand-by Refrigeration unit.

TECHNICAL DATA:

MODEL	Dimensions (mm)			Eclectic Power K.W	Net Weight (KG)
	L	W	H		
MMR-S-4D two ranges, four individual doors, upright mortuary Refrigerator	2000	2300	2100	???	
MMR-S-6D two ranges, six individual doors, upright mortuary Refrigerator	2000	2300	2700	???	
MMR-S-9D three ranges, nine individual doors, upright mortuary Refrigerator	3000	2300	2700	???	

Masria, In Line with its policy to continually improve its quality, reserves the right to change specs without notice.

+202 44812326/8

masria@masria.com

masriagroup

+201 001609002/10

www.masria.com

masriagr

